


RENOFLOR<sup>®</sup>

丽江

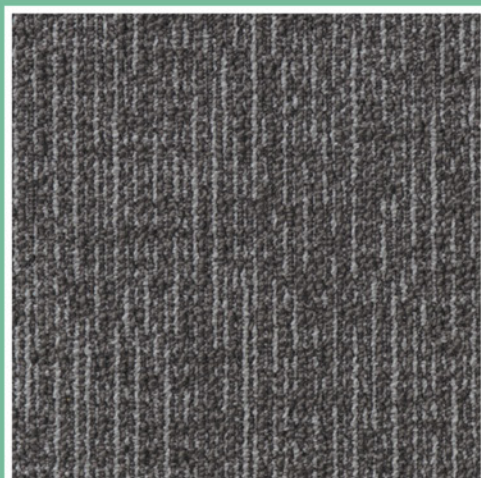

丽江400

RENOFLOR<sup>®</sup>

丽江100



丽江100+200



丽江100+200



丽江100+300



丽江400



丽江200+400



丽江500





丽江300+500



丽江600



# RENOFLOR® | 丽江



丽江100  
33.3cm\*100cm



丽江200  
33.3cm\*100cm



丽江300  
33.3cm\*100cm



丽江400  
33.3cm\*100cm




丽江500  
33.3cm\*100cm




丽江600  
33.3cm\*100cm

## INSTALLATION INSTRUCTIONS:



Ashlar



Herringbone

## PRODUCT INFORMATION

Style name/产品名称	丽江
Construction/结构	Multi-Level Loop
Fiber/纤维	100% KVL™
Dye method/染色工艺	100% solution dyed
Backing/底背	环保PVC/Bio-ReBac®(可选)
Tufting Gauge/针密	1/10
Pile Weight/绒重	500g/m <sup>2</sup>
Pile Height/绒高	3-5mm
Total Thickness/厚度	Approx 6mm
Tile Size/尺寸	33.3cmX100cm
Nbs Smoke 烟密度	(ASTM E 662)less than 450
Flooring Radiant Panel 临界热辐射通量	Class(Mean average CRF: 0.45 watts/cm <sup>2</sup> orhigher) ASTM E-648
Electrostatic Propensity 静电倾向	3.0kV or lower AATCC 134
Colourfastness to Light 耐光色牢度	≥4 after 100 hours AATCC 16E

## PRODUCT NOTES:

1. Product specifications are derived from averages resulting from normal manufacturing tolerances in yarn, fiber, temperature, humidity and colour. Product specifications may vary within normal industry and standardised testing tolerances.
2. These specifications reflect mean averages based upon tests of production runs of this carpet style by independent laboratories. A range of variances is implicit in the testing process. Furthermore, the standard test methods established to derive the specifications lack a degree of precision and repeatability; therefore, individual test results on the actual carpet purchased may differ from the specifications above.
3. Colours may vary slightly from dye lot to dye lot.
4. Backing or other materials may be changed without prior notice when shortages occur or when technological advancements become available which provit for improvement of the product's performance.
5. All products are 100% recyclable.



GLP100946